

Smart Cavity Mount

BC81288



Hard wired, high capacity premium series (cavity mountable) dynamic tracking AC mains filter and surge protection isolation module. Internal back EMF protected.

High temperature/high impact polycarbonate housing.

EMI/RFI noise reduction filter. Rated for 1 to 4 outlet.

Key features

- Dynamic active tracking double filtration
- 16 Separate protection & filtration components
- Internal back EMF protected
- High temp/high impact polycarbonate housing
- EMI/RFI noise reduction filter type
- Rated for 1 to 4 outlet, wall plates (optional) POA


Smart Cavity Mount

Model Number:

CM90

Part Number:

BC81288

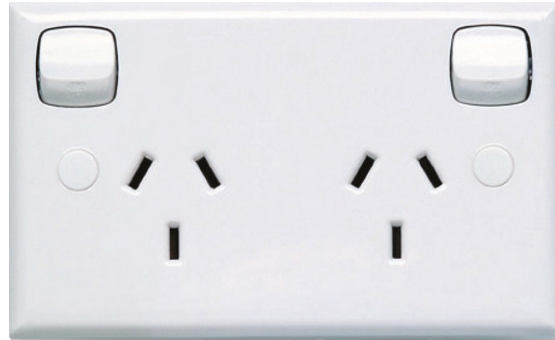

Specifications

- Supply Voltage 240/Vac 50/Hz
- Maximum Current Rating 16 amps/3840W (VA)
- Clamping Voltage 275 Vac Reaction Time Less than 1 Nano sec
- Maximum Transient Spike Impulse Current (Amps) 49,000 Amps
- Maximum Energy Dissipation (Joules) 1330 Joules
- Protection Modes (all 3 conductors) Active/Neutral, Active/Earth, Neutral/Earth
- Earth Leakage Range Less than 1m Amp
- Operating Conditions Indoor/AC Mains
- Operating Temperature -10 0 C/+60 0C

For more information on this and other best-in-class solutions from Hills call us on **1300 HILLS1 (1300 445 571)** or visit **hills.com.au**

hills.com.au

HILLS[™]