



# TITAN<sup>®</sup>

ACCESSORIES



## OUR MISSION

When your business depends on the tools you use,  
you need to be able to count on the people who make them.

Our relentless commitment to helping every professional painter  
be their best leads to better work, improved ROI and growing business.



### 04 AIRLESS GUNS

An industry leader in spray gun technology – Titan offers a full line of the best quality airless guns for every application imaginable.

### 08 AIRLESS TIPS

Titan offers a full range of spray tips for a full range of applications.

### 16 GUN ACCESSORIES

Titan has a guard for every tip and the best paint filters available. And if your arms just aren't long enough we have a reach tool or gun extension.

### 18 ROLLERS

Our rollers have the speed of a sprayer and the control of a roller.

### 20 AIRLESS HOSES

Designed to withstand time and pressure, Titan's full line of airless hoses will have you covered for every job.

### 22 FITTINGS

Need more hose length or need to alter the angle of the hose connected to the sprayer? You need Titan manifolds and fittings.

### 26 LINE STRIPING

Check out our hard working assortment of accessories devoted specifically to pavement and turf marking.

### 28 HVLP GUNS & ACCESSORIES

For contractors and finishing professionals that expect flawless results. We have the tools for the perfect finish.

Contact one of our dependable Country Importer or call our dedicated customer service team for more information.

Visit us on the web at:

[titantool.com](http://titantool.com)

Service Department

[Customer.Service-PF@wagner-group.com](mailto:Customer.Service-PF@wagner-group.com)

#### ADDRESS

**J. Wagner GmbH**  
Otto-Lilienthal-Str. 18  
88677 Markdorf

All information contained in this brochure is based on the latest information available at the time of printing. Titan reserves the right to make changes at any time, without notice. Due to continuous innovation, specifications may progressively change. Contact one of our dependable sales reps or call our dedicated customer service team for more information.

All information contained in this brochure is based on the latest information available at the time of printing. Titan reserves the right to make changes at any time, without notice.





# RX-PRO™

## AIRLESS SPRAY GUN



**Infinity Packing™**  
2X the gun life by reversing the seat and changing the ball.




**FingerPrint Grip™**  
Customize the grip to comfortably fit any painter's hand.



**Ultra-Light Trigger**  
30% lighter than the competitor's trigger pull decreasing fatigue.



**Onboard Tools**  
Smart tools that make jobsite life easier.

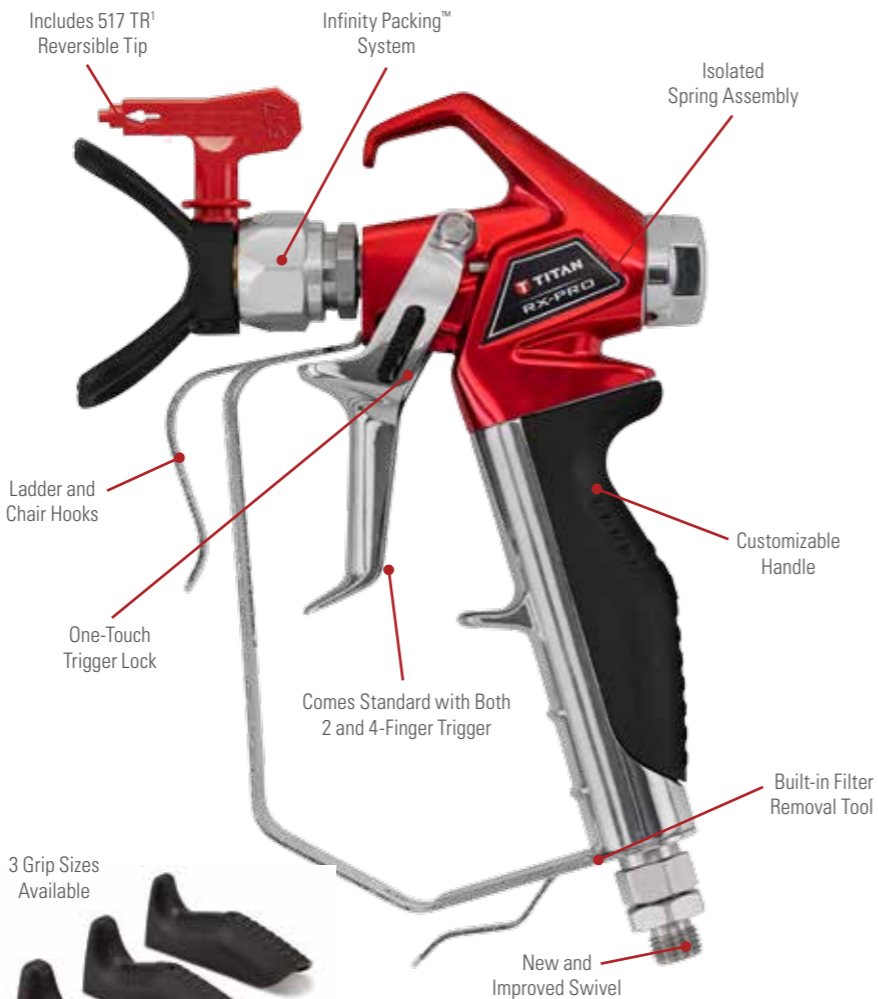

### RX-Pro™ FingerPrint Grip™

Customizable to your hand size.

DESCRIPTION	PART NO.
Small	0538217
Medium	0538218
Large	0538219

- Comes with both 2 and 4-finger trigger
- Pressure rated at 250 Bar

DESCRIPTION	PART NO.
RX-Pro Airless Gun w/SC-6+ Tip	0538021
RX-Pro Ball Valve	0538221
RX-Pro Seat	594-033
RX-Pro Ball & Seat Assy.	0538204

<sup>1</sup>Includes additional a 3' whip hose.

# RX-80™

## AIRLESS SPRAY GUN



**Comfort Grip™**  
Ergonomic design brings added comfort



**Longer Life Packing Kit**  
Lasts longer with improved performance.



**Onboard Tools**  
Smart tools that make jobsite life easier.



- Comes with 2 or 4-finger trigger
- Pressure rated at 250 Bar

DESCRIPTION	PART NO.
RX-80 Gun, 4-Finger w/SC-6+ Tip	0538007
RX-80 Gun, 2-Finger w/SC-6+ Tip	0538008
RX-80, 4-Finger no Tip	0538009
RX-80 2-Finger no Tip	0538014

<sup>1</sup>Includes additional a 3' whip hose and a 2-finger trigger.



# HANDLE SPECIALIZED COATINGS WITH EASE

Titan S-Series stainless steel spray guns hold up under extreme pressure and built for contractors that need to spray at pressures from 3900 PSI to 7700 PSI. The S-Series can handle corrosive coatings due to the stainless steel fluid passage. The Tungsten Carbide ball valve and seat will ensure long life and durability. Just pull the trigger and the Titan S-Series spray guns will deliver an excellent finish.

## S-3 Airless Gun

- In-handle filter
- Easy 4-finger trigger pull
- 1/4" swivel reduces hose kinks
- Pressure rated at 270 Bar

Not suitable for spraying heavy materials such as plaster

DESCRIPTION	PART NO.
S-3 Gun with Tip	550-250
S-3 Gun, Hose and Tip Kit	550-460
S-3 Repair Kit	550-275

## S-5 Airless Gun

- Stainless steel fluid passages
- Front feed, filter-less design for heavy coatings
- Easy 2-finger trigger pull
- Pressure rated at 345 Bar

DESCRIPTION	PART NO.
S-5 Gun with Tip	550-100
S-5 Gun, Hose and Tip Kit	550-110
S-5 Repair Kit	520-025

## S-7 Airless Gun

- In-handle filter
- Available in two swivel sizes
- Easy 4-finger trigger pull
- Swivel reduces hose kinks
- Includes 517 TR<sup>1</sup> high pressure, heavy-duty reversible tip and guard
- Pressure rated at 530 Bar

DESCRIPTION	PART NO.
S-7 Gun with 1/4" Swivel	550-260
S-7 Gun with 3/8" Swivel	550-270
S-7 Repair Kit	550-276



■ S-3 Airless Gun



■ S-5 Airless Gun



■ S-7 Airless Gun

# FROM FINE FINISHING TO THE HARSHTEST COATINGS

From the harshest coatings (Mastic Guns) to detailed fine finish work (GM 3600) Titan has a gun that fits your needs.



■ M-4 Mastic Gun

## M-4 and M-8 Mastic Guns

- Straight line fluid passage allows max flow rate
- Angled handle for increased comfort
- Adjustable needle packing prolongs the life of critical wear parts
- Swivel allows freedom of movement without hose kinking
- Lightweight metal construction

DESCRIPTION	BAR	PART NO.
M-4 Mastic Gun	250	0289013
M-8 Mastic Gun	530	0289014

## For Textured Applications

### Splatter Nozzle 765-360

Add the splatter nozzle to any airless spray gun for smooth texture applications including orange peel and knock down. For best results use with S or M Series Airless Guns.

Air requirement 4-12 CFM at full open.





# THE INDUSTRY LEADER IN TIP TECHNOLOGY

Airless spray tips are a key component to the successful operation of an airless spray system. They define the spray pattern, control the flow, atomize the coating and ultimately tell the pump how hard it must work. A proper understanding of airless tips is critical to the success of any airless application.



## Tip Characteristics

It is important to remember that the orifice size, in conjunction with the fan-width, determines the spray characteristics of the tip.

## Tip Wear


When beginning a project, choosing the right tip size and fan width will determine both coating consumption and production time. If the tip size is wrong — by either choice or through wear — mil thicknesses will be too heavy and the finish will be unprofessional.

The spray pattern chart demonstrates what happens as a tip wears. As wear occurs, the pattern size decreases and the orifice size increases. You will have to make more passes to cover the same area. There is no standard rate of tip wear due to the variation of the abrasiveness of all coatings.

## Examples for Understanding Airless Tips


### Example A:

The larger the orifice with the same fan width, the greater the volume of paint applied to the area.

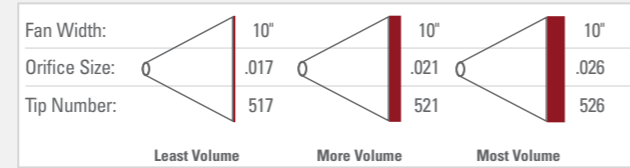

### Example B:

The larger the fan width with the same orifice means the same amount of material is being applied over a greater area. The result is less volume of paint per square inch.

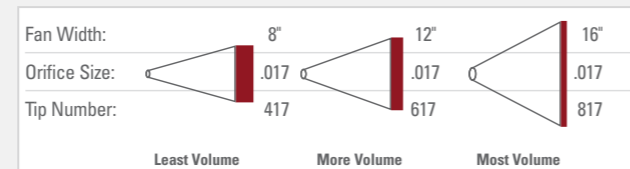

## How a Tip Fan Pattern Typically Wears

SC-6+ WITH 517 TIP			
SPRAY PATTERN WIDTHS			
New 517	Worn to 419	Worn to 321	Worn to 223
FLOW RATES			
.31 gpm (1.17 l/m)	.39 gpm (1.47 l/m)	.47 gpm (1.78 l/m)	.57 gpm (2.15 l/m)
FLOW RATE INCREASE			
0%	26%	52%	84%



## SC-6+

HIGH QUALITY

- Up to 22% wider fan pattern
- Fits all Titan and most industry standard guards





## TR<sup>2</sup>

VERSATILE


The TR<sup>2</sup> is one tip with two fan patterns. Switch from wide or narrow fan patterns with a simple twist.

- Speed and control at your fingertips
- Consistent film thickness when using wide or narrow fan pattern

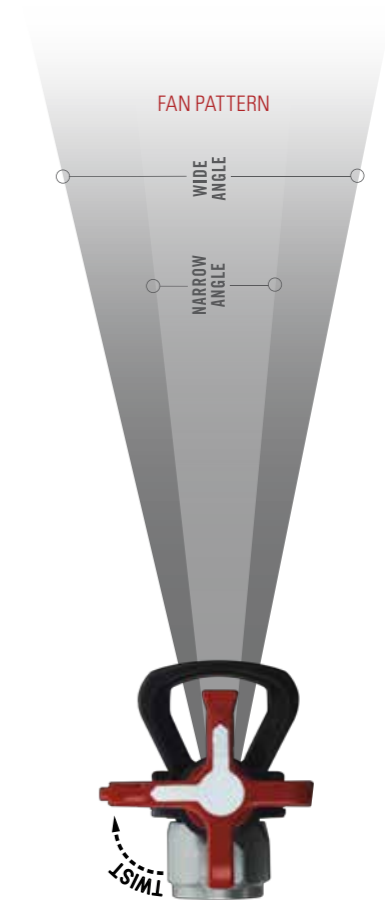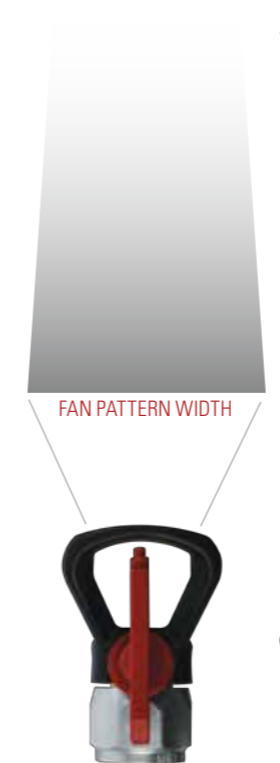

# HIGH QUALITY SC-6+ REVERSIBLE TIP

- Up to 22% wider fan pattern
- Fits all Titan and most industry standard guards

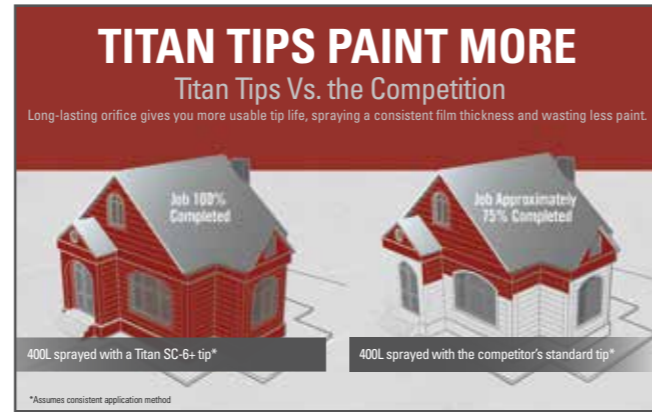

## SC-6+ Tips 662-XXX

		ORIFICE WIDTH (INCHES)																					
		INCHES	MM	0.007	0.009	0.011	0.013	0.015	0.017	0.019	0.021	0.023	0.025	0.027	0.029	0.031	0.033	0.035	0.039	0.043	0.045	0.051	0.055
FAN PATTERN WIDTH	2-4	51-102																					
	4-6	102-152	207	209	211	213	215	217	219	221	223	225	227	229	231	233	235						
	6-8	152-203	307	309	311	313	315	317	319	321	323	325	327	329	331	333	335						
	8-10	203-254	407	409	411	413	415	417	419	421	423	425	427	429	431	433	435	439	443	445	451	455	
	10-12	254-305		509	511	513	515	517	519	521	523	525	527	529	531	533	535	539	543	545	551	555	
	12-14	305-356		609	611	613	615	617	619	621	623	625	627	629	631	633	635	639	643	645	651	655	
	14-16	356-406								719	721					731		735					
	16-18	406-457								821					831								
	Flow (GPM)	---	0.05	0.09	0.13	0.18	0.24	0.31	0.39	0.47	0.57	0.67	0.78	0.91	1.03	1.17	1.32	1.64	1.99	2.18	2.80	3.26	
	Flow (LPM)	---	0.19	0.34	0.45	0.68	0.91	1.17	1.47	1.78	2.15	2.53	2.95	3.44	3.89	4.42	4.99	6.20	7.52	8.24	10.58	12.32	

Maximum Working Pressure: 345 Bar



## SC-6+ Synergy Fine Finishing Tips 671-XXX

		ORIFICE SIZE (INCHES)					
		INCHES	MM	0.008	0.010	0.012	0.014
FAN PATTERN WIDTH	4-6	102-152	208	210	212	214	
	6-8	152-203	308	310	312	314	
	8-10	203-254	408	410	412	414	
	10-12	254-305		510	512		
	12-14	305-356			612		
	Flow (GPM)	---	0.07	0.11	0.16	0.21	
	Flow (LPM)	---	0.26	0.42	0.60	0.79	

Maximum Working Pressure: 345 Bar



# PREMIUM TR<sup>1</sup> REVERSIBLE TIP

- The best overall performing tip in the industry
- Fan pattern stays wider longer
- An orifice that outlasts competitive tips delivering consistent film thickness and less wasted paint
- Fits all Titan and most other industry spray gun guards



## TR<sup>1</sup> High Pressure Tips 696-XXX

		ORIFICE SIZE (INCHES)																						
		INCHES	MM	0.007	0.009	0.011	0.013	0.015	0.017	0.019	0.021	0.023	0.025	0.027	0.029	0.031	0.033	0.035	0.037	0.039	0.043	0.045	0.051	0.055
FAN PATTERN WIDTH	2-4	51-102	107	109	111	113	115	117	119															
	4-6	102-152	207	209	211	213	215	217	219	221	223	225	227											
	6-8	152-203	307	309	311	313	315	317	319	321	323	325	327	329	331	333	335	337	339					
	8-10	203-254		409	411	413	415	417	419	421	423	425	427	429	431	433	435		439	443	445	451	455	
	10-12	254-305		509	511	513	515	517	519	521	523	525	527	529	531	533	535	537	539	543	545	551	555	
	12-14	305-356		609	611	613	615	617					627									651	655	
	14-16	356-406							717	719	721	723	725	727		731	733	735						
	16-18	406-457							817	819	821						835	837	839					
	18-20	457-508										923	925	927		931			937					
	Flow (GPM)	---	0.05	0.09	0.13	0.18	0.24	0.31	0.39	0.47	0.57	0.67	0.78	0.91	1.03	1.17	1.32	1.40	1.64	1.99	2.18	2.91	3.26	
	Flow (LPM)	---	0.19	0.34	0.45	0.68	0.91	1.17	1.47	1.78	2.15	2.53	2.95	3.44	3.89	4.42	4.99	5.29	6.20	7.52	8.24	11.00	12.32	

Maximum Working Pressure: 530 Bar

## TR<sup>1</sup> Line Striping Tips 697-XXX

		ORIFICE SIZE (INCHES)														
		INCHES	MM	0.013	0.015	0.017	0.019	0.021	0.023	0.025	0.027	0.029	0.031	0.035	0.039	0.043
FAN PATTERN WIDTH	2	51	213	215	217	219										
	4	102	413	415	417	419	421	423	425	427	429	431	435	439	443	
	6	152		615	617	619	621	623	625	627	629	631	635	639	643	
	8-10	203-254					821	823	825	827	829	831	835	839	843	
	Flow (GPM)	---	0.18	0.24	0.31	0.39	0.47	0.57	0.67	0.78	0.91	1.03	1.32	1.64	1.99	
Flow (LPM)	---	0.68	0.91	1.17	1.47	1.78	2.15	2.53	2.95	3.44	3.89	4.99	6.20	7.52		

Maximum Working Pressure: 345 Bar







# A GUARD FOR EVERY TIP

Titan tip guards are designed to maximize airflow with minimal overspray. With a guard for every tip and the universal fitting which matches most industry standard guns we have you covered.



## No Build Guard (7/8") 0289228

Aerodynamic dimple design allows for better airflow and less paint build up. Seal cavity on safety guard has large "flats" for quick and easy installation of seal.

- ▶ Rotate guard without loosening from gun
- ▶ No tools needed for installation
- ▶ Interchangeable with most industry spray guns
- ▶ Pressure rated at 345 Bar

## High Pressure Tip Guard (7/8") 661-027

- ▶ Interchangeable with most industry spray guns
- ▶ Pressure rated at 530 Bar

## Adjustable and Flat Tip Guard

- ▶ Interchangeable with most industry spray guns
- ▶ Pressure rated at 345 Bar

DESCRIPTION	PART NO.
7/8" - 14	450-100A
11/16" - 14 (Flat tips only)	0153003

## Seals



DESCRIPTION	PART NO.
Metal Retainer	651-040
Black Seal, Latex	651-042
White Seal, Solvent Resistant	651-020
White Seal, Solvent Resistant (6-pack)	661-021
Seal and Retainer Kit, Solvent Resistant (5-pack)	661-020
Seal and Retainer Kit, Solvent Resistant (12-pack)	651-060
Gasket Kit, 1/8" (12-pack)	711-612A
Gasket Kit, 1/16" (12-pack)	711-606



# THE BEST FILTERS AVAILABLE

Nothing destroys a piston or a gun tip faster than debris in the coating. That's why you need the best paint filters available. Titan gun filters and manifold filters are designed for long life and maximum protection. They are made from stainless steel for strength and service. We offer a wide variety of mesh sizes from 0 to 150.

## Gun and Pump Filters

Unthreaded filter design for quick and easy replacement.

For use with RX-Pro™, RX-80™, G-10, LX-30, LX-40, LX-50, LX-70, S-3 and S-7.

UNTHREADED		
FILTERS	BULK PART NO.	2-PACK PART NO.
Coarse (Green)*	581-059	0089957
Medium (White)	581-060	0089958
Fine (Yellow)	581-062	0089959
Extra Fine (Red)	581-061	0089960

\*Manifold filter for Advantage 400.



For use with LX-80<sup>ii</sup> and LX-80 Platinum.

THREADED		
FILTERS	BULK PART NO.	2-PACK PART NO.
Coarse (Green)*	540-030	500-200-03
Medium (White)	540-060	500-200-06
Fine (Yellow)	540-100	500-200-10
Extra Fine (Red)	540-150	500-200-15

\*Manifold filter for 440i and Impact 400.



▶ Pump Manifold Filters

## Pump Manifold Filters

For use on Impact® 440-1140; 640ix-1140ix.

MESH	PART NO.
Coarse-30 Mesh	730-067-30
Medium-60 Mesh	730-067
Fine-100 Mesh	730-067-10

For use on PowrTwin™ 4900, 5500, 6900, 8900, 10000 and 12000 Plus.

MESH	PART NO.
Mastic-0 Mesh	930-004
Coarse-5 Mesh	930-005
Medium-50 Mesh*	930-006
Fine-100 Mesh	930-007

\*Standard with sprayer. Includes ball.



For use on Hydra™, PowrTwin 3500 and 4500.

MESH	PART NO.
Coarse-5 Mesh	920-001
Medium-50 Mesh*	920-004
Fine-100 Mesh	920-005

\*Standard with sprayer, excludes ball. Ball check sold separately (920-103).

For use on all 10" PowrCoat™ models.

MESH	PART NO.
Medium-60 Mesh	0533514

For use on Titan E15, E20, G40 and G55.

MESH	PART NO.
Coarse-30 Mesh	761-042

## Pump Manifold Filter Plugs



MESH	PART NO.
Impact 400	0532357
Impact 440, 540, 640	0552934
Impact 740-1140 and 1200SF	0558668



## Inlet Screens

SMALL		
MESH	PART NO.	
30 mesh (Fine)	700-900	
10 mesh (Coarse)	700-805	
30 mesh (Male Thread)	0552947	

LARGE		
MESH	PART NO.	
30 mesh (Fine)	710-191	
10 mesh (Coarse)	710-046A	

HYDRAULIC AND PNEUMATIC	
DESCRIPTION	PART NO.
PowrTwin 4900, 6900, 8900, 12000 Plus and XLT	0509762A
All GHD	710-046A
Hydra Pro IV	0509762A
PowrCoat 10" (30 Mesh)	0533968

## In-Line Filter 550-223

Designed for added filtration or when using a gun without a filter.



▶ In-Line Gun Filter



# WHEN YOUR ARMS JUST AREN'T LONG ENOUGH

- Maximize the speed and efficiency of your operation
- Minimize danger – eliminate reaching from ladders
- Get the job done safely and quickly the first time
- Paint easily from a safe distance, keeping yourself and clothing clean



## SprayGuide™ 0538900

May your lines be straighter and your profits greater! This unique free-wheeling disc glides smoothly over virtually every surface.

Cut-in around windows, doors, trim and more without time consuming prep work.

- Eliminates time consuming masking or cutting in with brush
- Attaches to a gun extension or an extension pole (sold separately) decreasing ladder work
- Pressure rated at 250 Bar

DESCRIPTION	PART NO.
SprayGuide™ Replacement Arm and Disk Only	0538902



## Aluminum Gun Extensions

Our aluminum gun extensions are lightweight and easy to handle and can be used with most brands of airless spray guns.

- Pressure rated at 250 Bar

7/8" x 14 Thread is Standard

DESCRIPTION	PART NO.
6" (15 cm)	651-070
12" (30 cm)	651-071
18" (45 cm)	651-072
24" (60 cm)	651-073



## High Pressure, Stainless Steel Gun Extensions

When you need something a little more heavy duty. Can be used with most brands of airless spray guns.

- Pressure rated at 530 Bar

7/8" x 14 Thread is Standard

DESCRIPTION	PART NO.
6" (15 cm)	611-280
12" (30 cm)	611-281
18" (45 cm)	611-282
24" (60 cm)	611-283

## Non-Spit Valve 0521012

Eliminate the spitting that occurs when spraying with pole extensions. Universal connection works with most industry extensions and guns.

- Pressure rated at 250 Bar



## Swivel Head

Titan's swivel heads permit a 260° rotation for greater spraying versatility and accessibility. Use with Titan gun extensions and extension poles.

DESCRIPTION	PART NO.
7/8" x 14 Thread Swivel Head - Female	651-139
7/8" x 14 Thread Swivel Head - Male	711-600



## Extension Pole

These lightweight aluminum extensions are constructed with inner core ribs which reinforce the pole and greatly increase their rigidity. The inner core rib construction allows different length poles to be easily coupled together up to 12', while maintaining the proper rigidity to suit most job conditions.

- Reach high out-of-the-way places when spray or pressure rolling
- Adapts to most airless guns
- Includes Extension Pole Coupling (0509908)
- Pressure rated at 250 Bar

DESCRIPTION	PART NO.
1.5' (0.46 m) Pole	310-381-1
3' (0.9 m) Pole	310-383-1
6' (1.8 m) Pole	310-386-1
3' Extension Pole with Swivel Head, 7/8" Nut	310-390
6' Extension Pole with Swivel Head, 7/8" Nut	0279976L

## LX-70 In-Line Gun 550-475

- All metal construction
- A natural extension to any pole
- In-handle filter
- Swivel reduces hose kinks and ensures effortless control
- Pressure rate at 250 Bar


Repair Kit (550-521)



## 6' Outrigger 757-920

Convert existing gun to 6' (2 m) pole gun and back in seconds. Outrigger allows you to increase production and profits. No additional hoses or fittings required.

- Constructed of lightweight and rigid aluminum to reduce arm fatigue
- Large, gun installation holder and knob
- Adapts to all Titan airless spray guns and most manufacturers airless spray guns

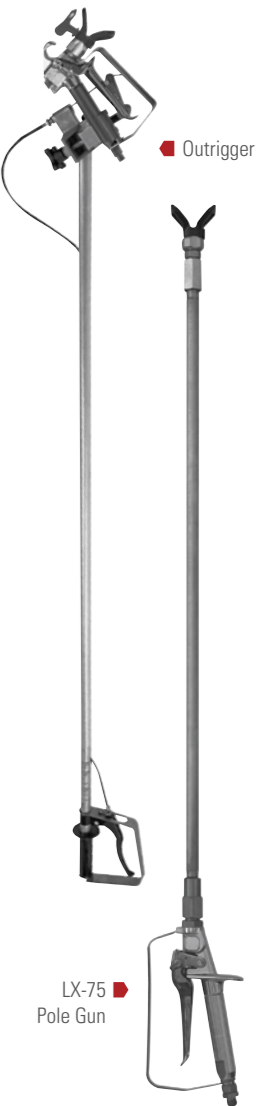

## LX-75 Pole Gun 550-495

Reach those high, out-of-the-way places that normally require the use of a ladder or scaffolding.

- All metal construction
- Full length needle ensures positive shut-off at tip
- Gun swivel
- In-handle filter
- Ergonomic design
- Pressure rated at 250 Bar

Repair Kit (550-487)



## Angle Adapter Assembly 0509907

Adapt any extension pole to any standard airless gun. Because of its right-angle design, the angle adapter allows the pole to extend from the gun at the same angle as the handle. The result is greater efficiency and comfort.

- Pressure rated at 250 Bar

## Extension Pole Coupling 0509908

Allows you to connect different length extruded poles together to create different lengths for any application. (Do not exceed 12')

# THE SPEED OF A SPRAYER AND THE CONTROL OF A ROLLER

Every painting contractor has worked with a roller. It's an efficient and controlled way to apply paint. But it's also much slower than a sprayer – up to 40% of your labor time is spent charging the roller with paint. What if you could combine the two? Titan has the answer.



## Inner-Feed Pressure Roller 310-934

Instead of dipping the roller into the paint, why not feed the paint into the roller? You get the best of both application worlds, increasing the speed and efficiency of your work – saving time and making a lot more money. It's much easier than you think and Titan has the equipment that lets you get the job done right.

- Up to 40% faster than standard roller application
- The roller never leaves the surface
- Easy to use and easy to clean up

Repair Kit (310-905)

## Inner-Feed Pressure Roller Kit 310-150

Includes:

- 3' (9 m) Pole
- 90° Angle Adapter
- Inner-Feed Roller head assembly
- 1/2" (1.30 cm) x 9" (23 cm) High Quality Inner Feed Roller Cover
- Fits onto any airless gun



Inner-Feed Pressure Roller

## LX-70 Telescoping Roller Kit 310-950

For high production paint applications where spraying is impractical. The patented auger head design evenly distributes coating for a professional finish every time. Includes lightweight aluminum adjustable pole with a working pressure of 1200 PSI (8.3 MPa).

- Telescoping pole adjustments from 3'-6" (0.9–1.8 m)
- Includes LX-70 In-Line Gun
- 9" (23cm) Inner-Feeder Roller Head
- 1/2" (1.30 cm) Nap/Roller Cover



## Telescoping Pole 310-938

**CAUTION! Do not use for spray applications.**



## Spray Roller 310-049

On rough, porous surfaces like stucco and concrete block many contractors apply the coating with a sprayer and then back-roll it into the surface. It can be messy (lots of overspray) and time consuming (you need two workers to do it). Now imagine what it would be like to spray AND roll at the same time. You save time and make money. That's what Titan is all about.

- Ideal for very porous and rough surfaces
- Spray on the down-stroke and roll on the upstroke
- Saves both time and money

## 3-in-1 Spray/Roll Application Kit 310-110

The Spray/Roll Application Kit offers the proper airless spray painting tools for just about every possible painting condition. It's the first complete application kit created for professionals. By selecting the proper combination of tools, the professional painter can choose to either spray, spray and back-roll or simply roll.

Includes:

- LX-70 In-Line Gun
- 9" (23 cm) Spray Roller Head Assembly
- 3' (9 m) Extruded Pole
- 9" (23 cm) Pressure Roller Head Assembly
- Swivel Head Assembly

## Roller Head Replacement Covers

SPRAYER ROLLER REPLACEMENT COVERS		
DESCRIPTION	NAP	PART NO.
9" (23 cm)	1/2" (1.20 cm)	311-050-9
9" (23 cm)	3/4" (1.90 cm)	311-075-9
9" (23 cm)	1-1/4" (3.10 cm)	311-125-9

INNER-FEED PRESSURE ROLLER REPLACEMENT COVERS		
DESCRIPTION	NAP	PART NO.
9" (23 cm)	3/4" (1.90 cm)	0155208K
9" (23 cm)	3/8" (0.95 cm)	0155206K





# THE RIGHT EQUIPMENT FOR THE JOB



## High Quality Airless Fluid Hoses and Whip Hoses

I.D.	LENGTH		MAX. WORKING PRESSURE - PSI (MPa)					END CONNECTION
	FEET	METERS	3300 (22.8)	3600 (24.8)	4500 (31.0)	6500 (44.8)	7500 (51.7)	
			PART NO.	PART NO.	PART NO.	PART NO.	PART NO.	
1/8"	3	0.9	---	---	0290685	---	---	1/4" NPSM (F/M)
	3	0.9	0291004	---	---	---	---	1/4" NPSM (F/M)
3/16"	5	1.5	316-506	---	---	---	---	1/4" NPSM (F/M)
	9	2.7	550-222	---	---	---	---	1/4" NPSM (F/M)
	25	7.6	0291007	---	---	---	---	1/4" NPSM (FBE)
	50	15.2	0291008	---	---	---	---	1/4" NPSM (FBE)
1/4"	3	0.9	---	---	250450003	250650003	250750003	1/4" NPSM (FBE)
	6	1.8	316-533*	---	250450006	250650006	250750006	1/4" NPSM (FBE)
	6	1.8	550-227	---	---	---	---	1/4" NPSM (F/M)
	25	7.6	316-513	---	---	---	---	1/4" NPSM (FBE)
	50	15.2	316-505	0286498	250450050	250650050	250750050	1/4" NPSM (FBE)
3/8"	100	30.5	---	---	250450010	250650010	250750010	1/4" NPSM (FBE)
	6	1.8	---	---	375450006	375650006	375750006	3/8" NPSM (FBE)
	25	7.6	0508342	---	---	---	---	3/8" NPSM (FBE)
	50	15.2	0291006	0286499	375450050	375650050	375750050	3/8" NPSM (FBE)
1/2"	100	30.5	---	---	375450010	375650010	375750010	3/8" NPSM (FBE)
	25	7.6	225-112*	---	---	---	---	1/2" NPSM (FBE)
	50	15.2	250-112*	---	500450050	500650050	500750050	1/2" NPSM (FBE)
3/4"	100	30.5	---	---	500450010	500650010	500750010	1/2" NPSM (FBE)
	50	15.2	---	---	---	750650050	---	3/4" NPSM (FBE)

\*Textile Braid. Spring guards at both ends. FBE Female Both Ends, NPT National Pipe Tapered Thread, NPSM National Pipe Straight Mechanical Thread, MBE Male Both Ends, F/M 1 Female / 1 Male Connection



It's now easy to find the proper high pressure hose.

### High Pressure Airless Hoses

Our new high pressure hoses are color-coded by pressure rating, making it easier to organize, identify and purchase.

First 3 digits indicate fitting or thread size, next 4 digits indicate max. PSI rating, last 2 digits indicate length.

INTERNAL DIAMETER	FIRST 3	PRESSURE	NEXT 4	LENGTH	LAST 2
1/4"	250	4500	4500	50'	50

Example: 1/4" X 50' 4500 PSI hose will be P/N 250450050

### Hose Shield 0521424

Protect your airless hose from paint and abrasion damage with a durable 0.1 mm poly hose cover. Comes in 335 m lengths with perforation every 1.5 m to fit any length of hose. Works with 1/4" and 3/8" hoses.



Hose sold separately.



### Reel-EZ Hose Reels

Eliminate hose hassles while increasing your production. Both models mount to most major manufacturer's paint sprayers with similar designs.

- The 16" Cart-Mount holds up to 100' (30.5 m) of 1/4" airless hose
- The 10" Skid-Mount holds up to 50' (15.2 m) of 1/4" airless hose
- Pressure rated at 250 Bar

Fits handles/carts 3/4" to 1-1/2" in diameter.

DESCRIPTION	PART NO.
16" Cart-Mount	769-100
10" Skid-Mount	769-200



### High Pressure Swivels

- Decreases resistance while spraying reducing overall fatigue
- Reduces hose kinking
- Pressure rated at 345 bar

DESCRIPTION	PART NO.
<b>Gun-to-Hose / Hose-to-Pump</b> 1/4" (0.63 cm) NPS (F) x 1/4" (0.63 cm) NPS (M)	0509985
<b>Hose-to-Hose</b> 1/4" (0.63 cm) NPS (M) x 1/4" (0.63 cm) NPS (M)	0502135



### Air Spray Hoses

DESCRIPTION	PART NO.
7.5 m x 3/8" Air (Red)	0550893
9 m x 3/8" Air (Red)	0295689
15 m' x 3/8" Air (Red)	0550891
7.5 m x 1/4" Fluid (Black)	0550894
9m x 3/8" Fluid (Black)	0277348
15 m x 3/8" Fluid (Black)	0275281
1 m Twin Hose	0552302
7.5 m Twin Hose	0552303

### Air Assisted Airless Spray Hoses

DESCRIPTION	PART NO.
7.5 m Bonded Hose	9984595
15 m Bonded Hose	0524333
1 m 6" Air Whip Hose	0550860
1.5 m Fluid Whip Hose	0550861

### High Pressure Fluid Gauge Kit 0508239

Includes: 345 bar high pressure fluid gauge attached to a T-Fitting with one 1/4" (M)(.63cm) fitting & one 1/4" (F)(.63cm) fitting.

Fluid Gauge Only (0508626)



# A FITTING FOR EVERY JOB

Spraying is more than just hooking up a hose. Sometimes the situation calls for extending hose length or altering the angle of the hose connected to the sprayer. That's when you need Titan manifolds and fittings. Our fittings are manufactured from quality stainless steel and engineered for durability and long life.

## Couplings

HOSE TO HOSE	
DESCRIPTION	PART NO.
1/4" NPS(M) x 1/4" NPS(M)	05045
1/4" NPT(M) x 3/8" NPS(M)	812-003
3/8" NPS(M) x 3/8" NPS(M)	490-014
1/2" NPT(M) x 1/2" NPS(M)	449-621

Maximum Working Pressure: 345 bar



HIGH PRESSURE HOSE TO HOSE	
DESCRIPTION	PART NO.
1/4" NPTF (M) x 1/4" NPTF(M)	9885642
3/8" NPTF (M) x 3/8" NPTF(M)	9885643
1/2" NPTF (M) x 1/4" NPTF(M)	9885644
3/4" NPTF (M) x 1/2" NPTF(M)	9885645
3/8" NPTF (M) x 1/4" NPTF(M)	9885646
1/2" NPTF (M) x 3/8" NPTF(M)	9885647
1/2" NPTF (M) x 1/2" NPTF(M)	9885648

Maximum Working Pressure: 517 bar



MANIFOLD TO MANIFOLD	
DESCRIPTION	PART NO.
1/4" NPT(M) x 1/4" NPT(M)	490-002
1/4" NPT(M) x 3/8" NPT(M)	490-006
3/8" NPT(M) x 3/8" NPT(M)	814-004
3/8" NPT(M) x 1/2" NPT(M)	814-005
1/2" NPT(M) x 1/2" NPT(M)	814-006
1/2" NPT(M) x 3/4" NPT(M)	101-201
3/4" NPT(M) x 3/4" NPT(M)	814-007

Maximum Working Pressure: 345 bar



MANIFOLD TO HOSE	
DESCRIPTION	PART NO.
1/8" NPT(M) x 1/4" NPS(M)	490-001
1/4" NPT(M) x 1/4" NPS(M)	227-006
1/4" NPT(M) x 3/8" NPS(M)	804-555
1/4" NPT(M) x 1/2" NPS(M)	814-003
3/8" NPT(M) x 1/4" NPS(M)	812-003
3/8" NPT(M) x 3/8" NPS(M)	808-555
3/8" NPT(M) x 1/2" NPS(M)	815-005
1/2" NPT(M) x 1/2" NPS(M)	228-002
3/4" NPT(M) x 1/2" NPS(M)	814-555

Maximum Working Pressure: 345 bar



## 90° Street Elbows

DESCRIPTION	PART NO.
3/8" NPT(F) x 3/8" NPT(M)	818-002
1/2" NPT(F) x 1/2" NPT(M)	818-003
3/4" NPT(F) x 3/4" NPT(M)	818-010

Maximum Working Pressure: 345 bar



## Reducer Bushings

DESCRIPTION	PART NO.
3/8" NPT(M) x 1/4" NPT(F)	817-001
1/2" NPT(M) x 1/4" NPT(F)	929-061
1/2" NPT(M) x 3/8" NPT(F)	541-009
3/4" NPT(M) x 1/4" NPT(F)	929-062
1" NPT(M) x 3/4" NPT(F)	929-076
1-1/4" NPT(M) x 1" NPT(F)	929-077


Maximum Working Pressure: 345 bar



## Pipe Tees

DESCRIPTION	PART NO.
1/4" NPT(F)	970-023
3/8" NPT(F)	817-002
1/2" NPT(F)	817-003
3/4" NPT(F)	817-004

Maximum Working Pressure: 345 bar



## Swivel Unions

DESCRIPTION	PART NO.
1/4" NPS(F) x 1/4" NPT(M)	490-005
3/8" NPS(F) x 1/4" NPT(M)	490-042
1/4" NPS(F) x 3/8" NPT(M)	490-032
3/8" NPS(F) x 3/8" NPT(M)	490-043
1/2" NPS(F) x 1/2" NPT(M)	200-555
3/4" NPS(F) x 3/4" NPT(M)	138-037
1" NPS(F) x 1" NPT(M)	200-556

Maximum Working Pressure: 345 bar




## Pipe Plugs

DESCRIPTION	PART NO.
1/4" NPT(M)	227-027
3/8" NPT(M)	227-033
1/2" NPT(M)	210-023
3/4" NPT(M)	210-038

Maximum Working Pressure: 345 bar





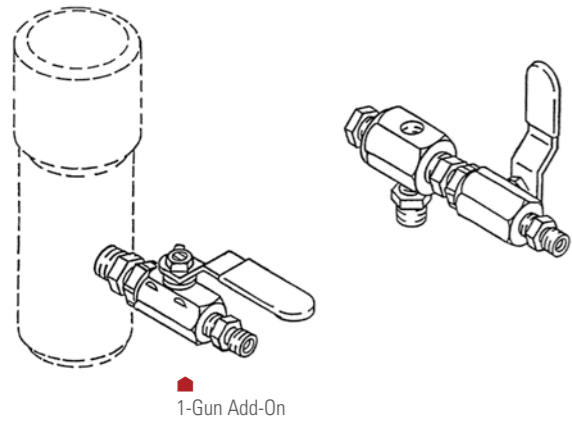

1-Gun Add-On

**Gun Add-On Kits:**

Can be used on pumps with an open 3/8" NPT port on the manifold.

	1-GUN ADD-ON		ADD-A-GUN	
	975-111 1/4" Hose	975-311 3/8" Hose	975-200 1/4" Hose	975-300 3/8" Hose
INCLUDES	PART NO.	PART NO.	PART NO.	PART NO.
Nipple, Hex	814-002	814-004	814-002	814-004
Ball Valve	940-553	941-555	940-553	941-555
Nipple, Hex	227-006	808-555	227-006	808-555
Plug, Pipe			227-033	227-033
Block, Manifold			970-100	970-100
Nipple, Hex			814-004	814-004

Maximum Working Pressure: 250 Bar

**Multiple Gun Add-on Assemblies (1/4")**

Hose connection 1/4" MPSM (M).

	975-212 2-Guns	975-213 3-Guns
INCLUDES	QTY.	QTY.
1-Gun Add-On (975-111)	1	1
Add-A-Gun Kit (975-200)	1	2

Maximum Working Pressure: 250 Bar

**Multiple Gun Add-on Assemblies (3/8")**

Hose connection 3/8" NPSM (M).

	975-312 2-Guns	975-313 3-Guns	975-314 4-Guns
INCLUDES	QTY.	QTY.	QTY.
1-Gun Add-On (975-311)	1	1	1
Add-A-Gun Kit (975-300)	1	2	3

Maximum Working Pressure: 250 Bar



**High Pressure Ball Valve**

FITTING SIZE	BAR	PART NO.
1/4"	410 Bar	0533358
1/4"	510 Bar	0533348
3/8"	410 Bar	0533359
3/8"	510 Bar	0533347

# KEEP YOUR EQUIPMENT CLEAN AND WORKING FOR YOU

No matter what the sprayer – hydraulic, gear driven, gas-powered or electric – if you want a long service life you will need to care for it with the same attention you care for your own car or truck. That means changing the oil, lubricating the piston, cleaning the unit, the gun and the tip. Titan has all the products you need to keep your accessories and equipment clean and functioning in top condition.

**PumpRunner** 0286008

The PumpRunner is the ideal accessory for your piston pump. It prevents the inlet valve from drying out, ensures clean transport and reduces clean up time. Works on most high rider model sprayers..

PumpRunner



# LINE STRIPER ACCESSORIES

## WindGuard™ Spray Shield 0290623

Spray shield protects spray pattern from wind, minimizing over-spray. Works well when applying diluted athletic field marking paints. Adjustable for easy "on the fly" line width changes – (10, 15 oder 20 cm) and is easily removed from sprayer.

- Attaches to any Titan PowrLiner and most competitive models
- Spring loaded shields promote forgiveness on uneven surfaces
- Lightweight – only 2,5 kg



## HandiBead™ Bead Dispenser 0290953A

Apply glass beads with consistency and accuracy. Eliminates hand tossing glass beads on stop bar or crosswalk applications.

- Adjustable diffuser can disperse material up to 38 cm wide
- Includes 3 nozzles (small, medium and large)



## LineSite™ Laser Pointer 0290038A

Great for start/stops, curb striping, executing perfectly straight lines and training new employees. High intensity green laser is easy to see in daylight.

- Includes two lasers, mounting kit and rechargeable battery pack
- Compatible with most line strippers

Laser class 3R - please observe the operating regulations



LineSite™ Laser Pointer

## Second Gun Kit

These gun kits come complete with mounting bracket, airless gun, 1,8 m x ¼" hose and line striping tip. Mounts on either side of 4950, 6950 and 8950 PowrLiner.

DESCRIPTION	PART NO.
S-3 Gun Kit	759-138
S-5 Gun Kit	759-038
PowrLiner 2850 Gun Kit	0290310



Second Gun Kit



## Glass Bead Dispensing Systems

Includes hopper, hose and dispenser.

DESCRIPTION	PART NO.
1-Gun Kit (10 - 15 cm)	424-826
2-Gun Kit (10 - 15 cm)	424-836
1-Gun Kit (30cm)	424-840
2-Gun Kit (30cm)	424-841
<b>Add a Second Dispenser to your 1-Gun Kit</b> Second Dispenser with Hose (10 - 15 cm)	424-816

Compatible with: 4950, 4955, 6950, 6955, 8950, 8955, 4900XLT, 6900XLT and 8900XLT. LazyLiner™ and PowrLiner™ sold separately.



SureTrak™ Floating Gun Kit



LazyLiner™ Tray

## SureTrak™ Floating Gun Kit 759-120

Keeps the gun at the proper height from the surface for perfect lines over rough terrain.


- Works great on pavement, grass and turf
- Attaches to PowrLiner™ 4950, 4955, 6950, 6955, 8950 and 8955

## LazyLiner Tray

Use this attachable tray system as an option for carrying around additional items.

- For use on the LazyLiner Pro and Elite

DESCRIPTION	PART NO.
LazyLiner Pro Tray (Must add bumper 0290646Z)	0290645Z
LazyLiner Elite Tray	0290645Z



SmartArm™ Pivot System



SmartArm™ Lift System

## SmartArm™ Assembly 0290382

Built to make line adjustments and transportation quick and easy.

- Pivots down for spraying and up for transportation/storage
- Locks in at any angle for curb striping
- Adjust gun height (fan pattern) up/down with the turn of a lever
- Automatically centers spray arm for easy set-up
- Graduated to return to your preferred spray position

## Striper Add-On Accessories

RECOMMENDED GUNS		
DESCRIPTION	PART NO.	
RX 80 (2-Finger-Grip; incl. tip)	0538008	
RX 80 (4-Finger-Grip; incl. tip)	0538007	
RX Pro (2-Finger-Grip; incl. tip)	0538022	
S-3 Gun; incl. tip	0550060	
S-5 Gun; incl. tip	0550070	

UPGRADES		
DESCRIPTION	PART NO.	
PowrLiner™ 850 Caster Release Kit	0293970	
45-Liters Hopper	759-130	
Polyethylene 19-Liter Pail Cover	759-147	
Turf Kit for PowrLinners 4955–8955	759-155	

## Hitches and Bumpers

DESCRIPTION	COMPACT	PRO	ELITE
	PART NO.	PART NO.	PART NO.
PowrLiner 2850	----	0290043Z	0290043Z
PowrLiner 4950, 4900xlt, 6900xlt, 8900xlt	0290047Z	0290047Z	0290047Z
PowrLiner 6950, 8950	0290048Z	0290048Z	0290048Z
PowrLiner 4955, 6955, 8955	----	0290045Z	0290045Z
Graco® 3900 and Up	0290050Z	0290050Z	0290050Z
Bumper / Engine Protection Bar	----	0290646Z	Included

The drivers are not shipped with a hitch; use chart to identify which hitch to order.



# TOOLS FOR THE PERFECT FINISH



## Maxum Elite Gun

For contractors and finishing professionals that expect flawless results with the versatility to use gravity or siphon fed cup gun.

- Removable and reversible fluid chamber design enables use with standard pressurized cup and pressurized gravity cup
- Stainless steel fluid passages
- Fluid needle stays with packing and head assembly for color and tip size changes—allows for easier storage and clean up
- Integrated check valve in gun head
- Patented grip design for stay-cool operation
- Multi-Position pick-up tube for spraying at various angles
- Comes standard with a #3 Proset (Needle set)

DESCRIPTION	PART NO.
Maxum Elite Gun with 1 Qt. Cup	0524027
Maxum Elite Gun with Gravity Cup	0524052

### MAXUM ELITE ACCESSORIES

DESCRIPTION	PART NO.
Pressure-Fed 1 Qt. Cup	0524027
Front End Accessory with 1 Qt. Cup Assembly and #3 Proset	0524073
Front End Accessory with 1 Qt. Cup Assembly and #4 Proset	0524074
Gravity Cup Accessory with Stand	0524045


## Maxum II Gun 0524041

For maximum control and pinpoint-accurate coating delivery, the Maxum II is an excellent choice for contractors and finishing professionals that need a precise fine finishing tool.

- Ability to convert from non-bleeder to bleeder gun
- Comes standard with a #3 Proset (Needle set) and 1 Qt. cup

### MAXUM II ACCESSORIES

DESCRIPTION	PART NO.
Pressure-Fed 1 Qt. Cup	0524041

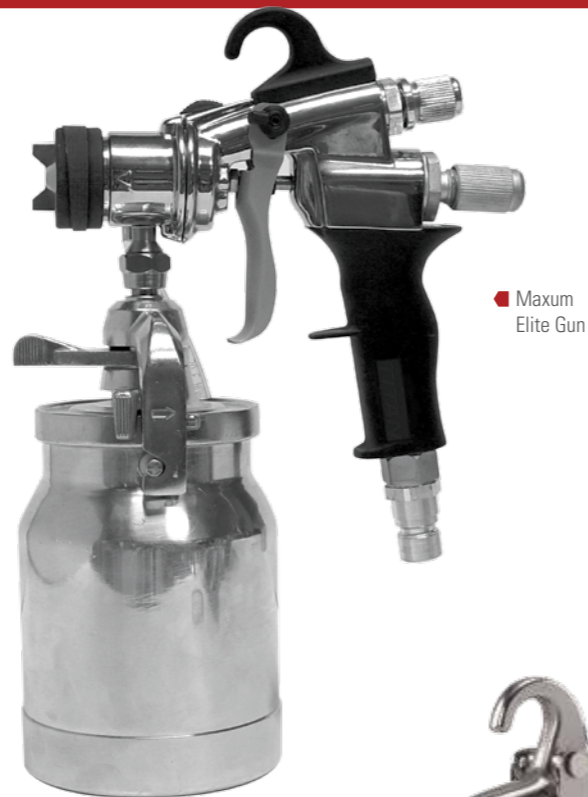

Maxum Elite Gun



Maxum II Gun



Maxum Elite Gun with Gravity Cup and Stand

## Projector Sets

DESCRIPTION	MAXUM II PART NO.	MAXUM ELITE PART NO.
#2 Proset (Fine Finish)	0276254	0524293
#3 Proset (All-Purpose)	0276227	0524294
#4 Proset (High Output)	0276228	0524295
#5 Proset (High Output)	0276229	0524296
#6 Proset (High Output)	0276245	0524297
#7 Proset (Highest Output)	0524211	0524298

Maxum II Standard Kit



## Maintenance and Repair Kits

### MAINTENANCE KITS

DESCRIPTION	MAXUM II PART NO.	MAXUM ELITE PART NO.
Deluxe Kit	0279941	0524189
Standard Kit	0279942	0524188

Gun Repair Kit for Maxum II Gun



### GUN REPAIR KITS / PARTS

DESCRIPTION	PART NO.
Replacement Check Valve Assemblies (3-Pack)	0297051
Check Valve Seals (10-Pack)	0276257
Gun Repair Kit for Maxum II Gun	0277943
Gun Repair Kit for Maxum Elite Gun	0524187
Spring Plate Assembly	0275250
Gun Repair Kit for 3100 Gun (Siphon and Pressure-Fed)	0550985
Gun Repair Kit for 3100 Gun (Gravity Fed)	0552916



### REPLACEMENT TURBINE FILTERS

DESCRIPTION	PART NO.
Air Filter Kit (Pleated) Capspray™ 95, 105 and 115 Atomizing Air	0524523A
Air Filter Kit (Foam-Black) Capspray 75 Motor Cooling	0529390
Air Filter Kit (Foam-Green) Capspray 75 Atomizing Air	0529390
Pre-Filter Kit (Qty. 2) Capspray 55, 75, 95, 105 and 115	0524526A

## Accessories

### CUPS AND ACCESSORIES

DESCRIPTION	PART NO.
1-Qt. Cup Assembly with Swivel Tube	0277183
1-Qt. Replacement Cup	0275573
2-Qt. Remote Cup System (Complete)	0524203
Air-Tight Lid for Paint Cups (Retains paint for long periods)	0508124
Cup Assembly without Swivel Tube	0275247
600 ml HVLP Top Feed	0524211
Gravity Cup Assembly with Stand	0524045
White, 1 Qt. Cup Gaskets, Hot Solvents (6-pack)	0297052
White, 2 Qt. Cup Gaskets, Hot Solvents	0524337

White, 1 Qt. Cup Gaskets





Air Hoses and Fittings

DESCRIPTION	PART NO.
6m x 3/4" Flex Air Hose	0275276
7,5m x 3/4" Flex Air Hose	0275277
9m x 3/4" Flex Air Hose	0277337
9m Air Hose	0295689
1,5m x 3/4" Air Whip Hose	0524405A
9m x 3/8" Material Hose	0277348
Quick Disconnect (F) Turbine	0275625

HVLP Power Cart 0524000

A compact, lightweight solution to major application projects.

HVLP POWER CART ACCESSORIES	
DESCRIPTION	PART NO.
Pressure Pot Liner	0275702
Pressure Pot Liner (12-Pack)	0295272
Solvent Resistant Gasket	0508943

1.9 Liter Cup 0524203

Transform your turbine system into a high capacity sprayer without adding the cost and weight of a bulky air compressor.

For use with Capspray 75-115 sprayers.  
1.5m Air whip hose sold separately.



HVLP Power Cart



PowerTex Gun

PowerTex™ Gun 0524039

Get more usage out of your Capspray HVLP turbine. Simply fill the hopper, plug into any Capspray HVLP turbine and air hose and start texturing. Achieve a unique textured finish with 3 spray nozzles – popcorn, knockdown and orange peel – each delivers a professional look without the high cost.

POWERTEX HOPPER GUN ACCESSORIES	
DESCRIPTION	PART NO.
PowerTex Nozzle Kit	0524567
PowerTex Hopper with O-Ring	0520206
PowerTex Air Adjustable Valve	0524966
Air Hose Adapter Assembly	0520211







**Distributed by:**

Sold exclusively through professional distributors

Visit us at: [www.titantool.com](http://www.titantool.com)



All information contained in this brochure is based on the latest information available at the time of printing. Titan reserves the right to make changes at any time, without notice. Due to continuous innovation, specifications may progressively change. Contact one of our dependable sales reps or call our dedicated customer service team for more information. J. Wagner GmbH | Otto-Lilienthal-Str. 18 | 88677 Markdorf | Customer.Service-PF@wagner-group.com | titantool.com